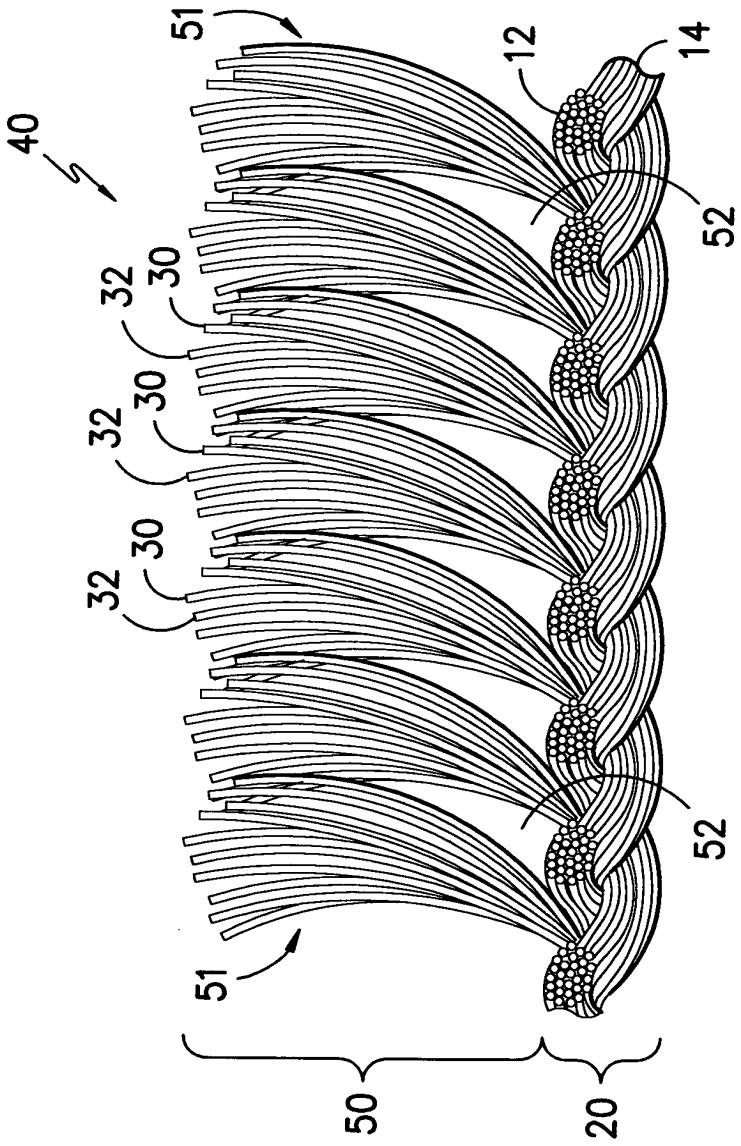

Figure -1-

PRIOR ART FABRIC

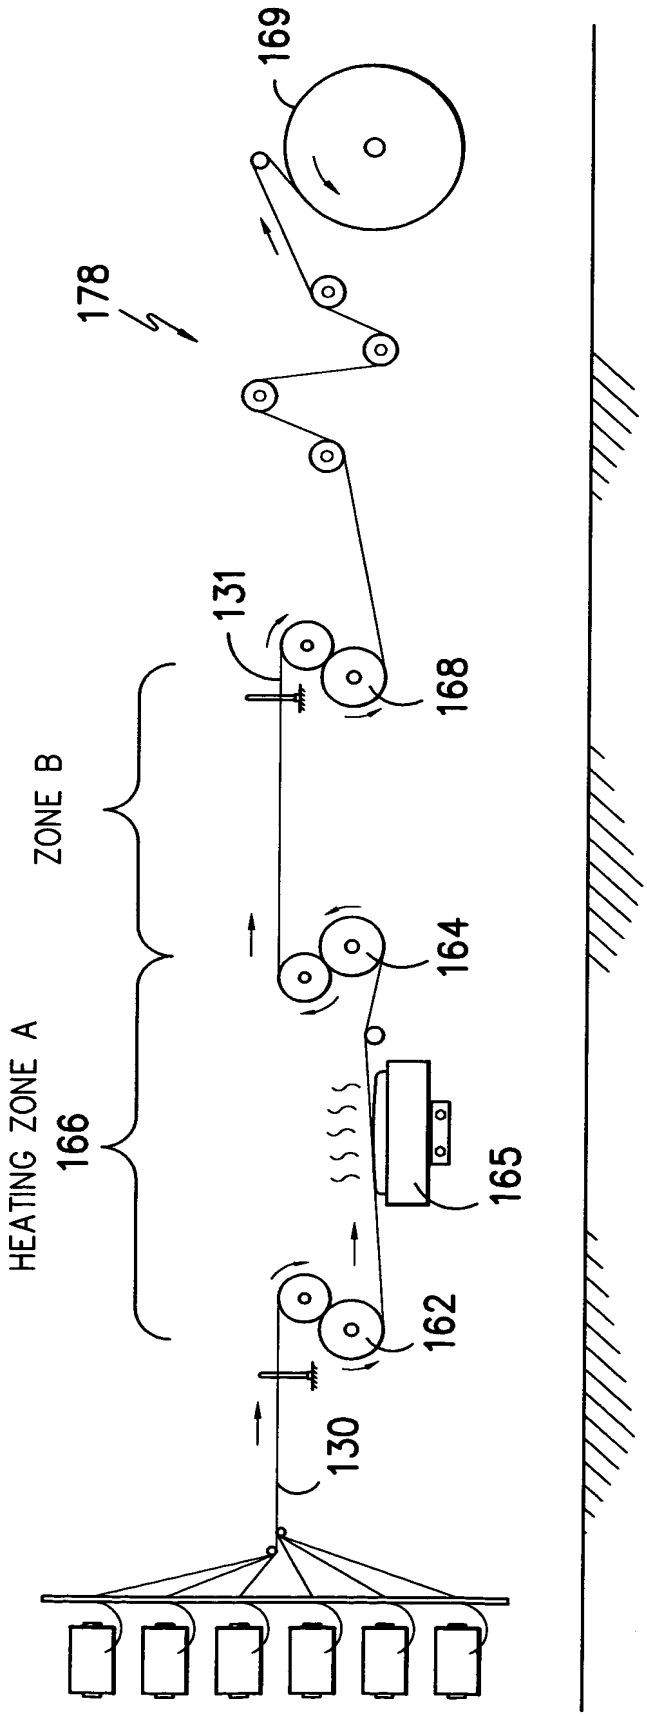

Figure -2-

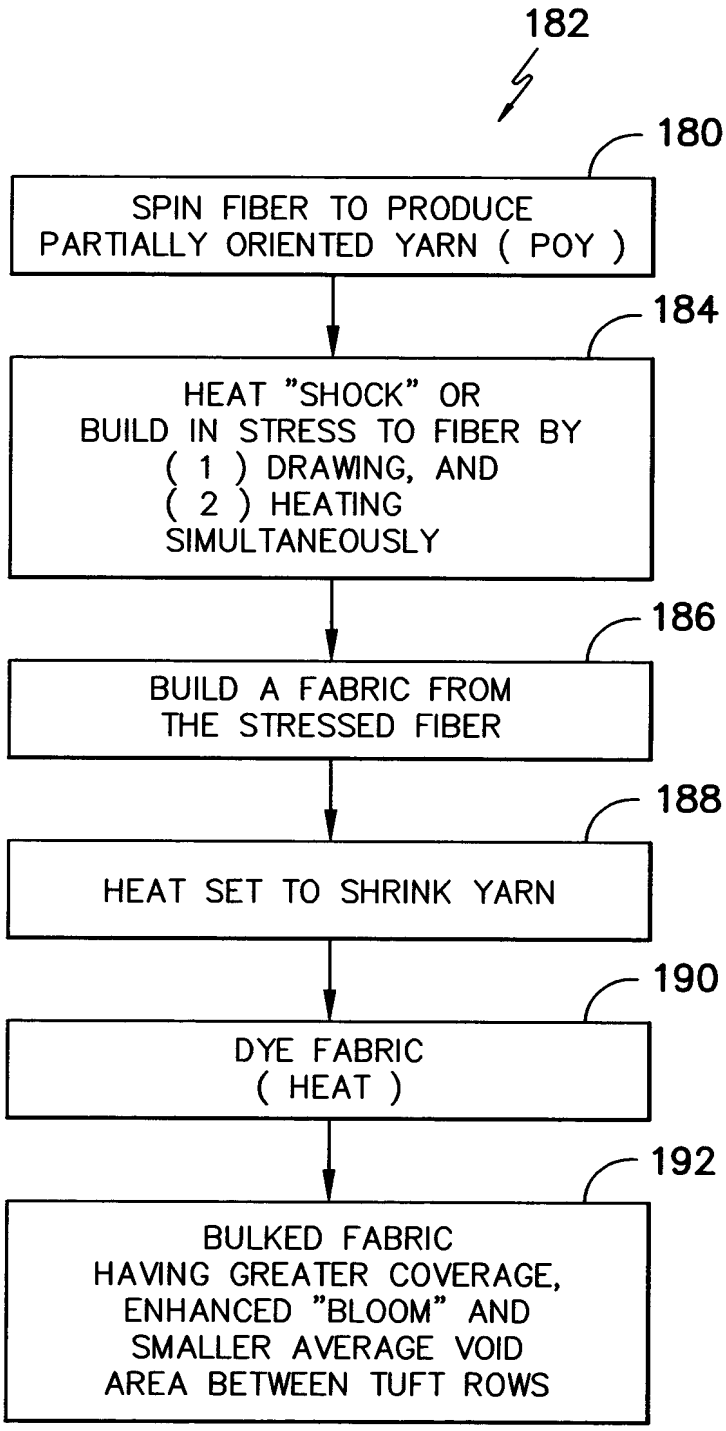
182
180
SPIN FIBER TO PRODUCE PARTIALLY ORIENTED YARN (POY)
184
HEAT "SHOCK" OR BUILD IN STRESS TO FIBER BY (1) DRAWING, AND (2) HEATING SIMULTANEOUSLY
186
BUILD A FABRIC FROM THE STRESSED FIBER
188
HEAT SET TO SHRINK YARN
190
DYE FABRIC (HEAT)
192
BULKED FABRIC HAVING GREATER COVERAGE, ENHANCED "BLOOM" AND SMALLER AVERAGE VOID AREA BETWEEN TUFT ROWS

Figure –3–

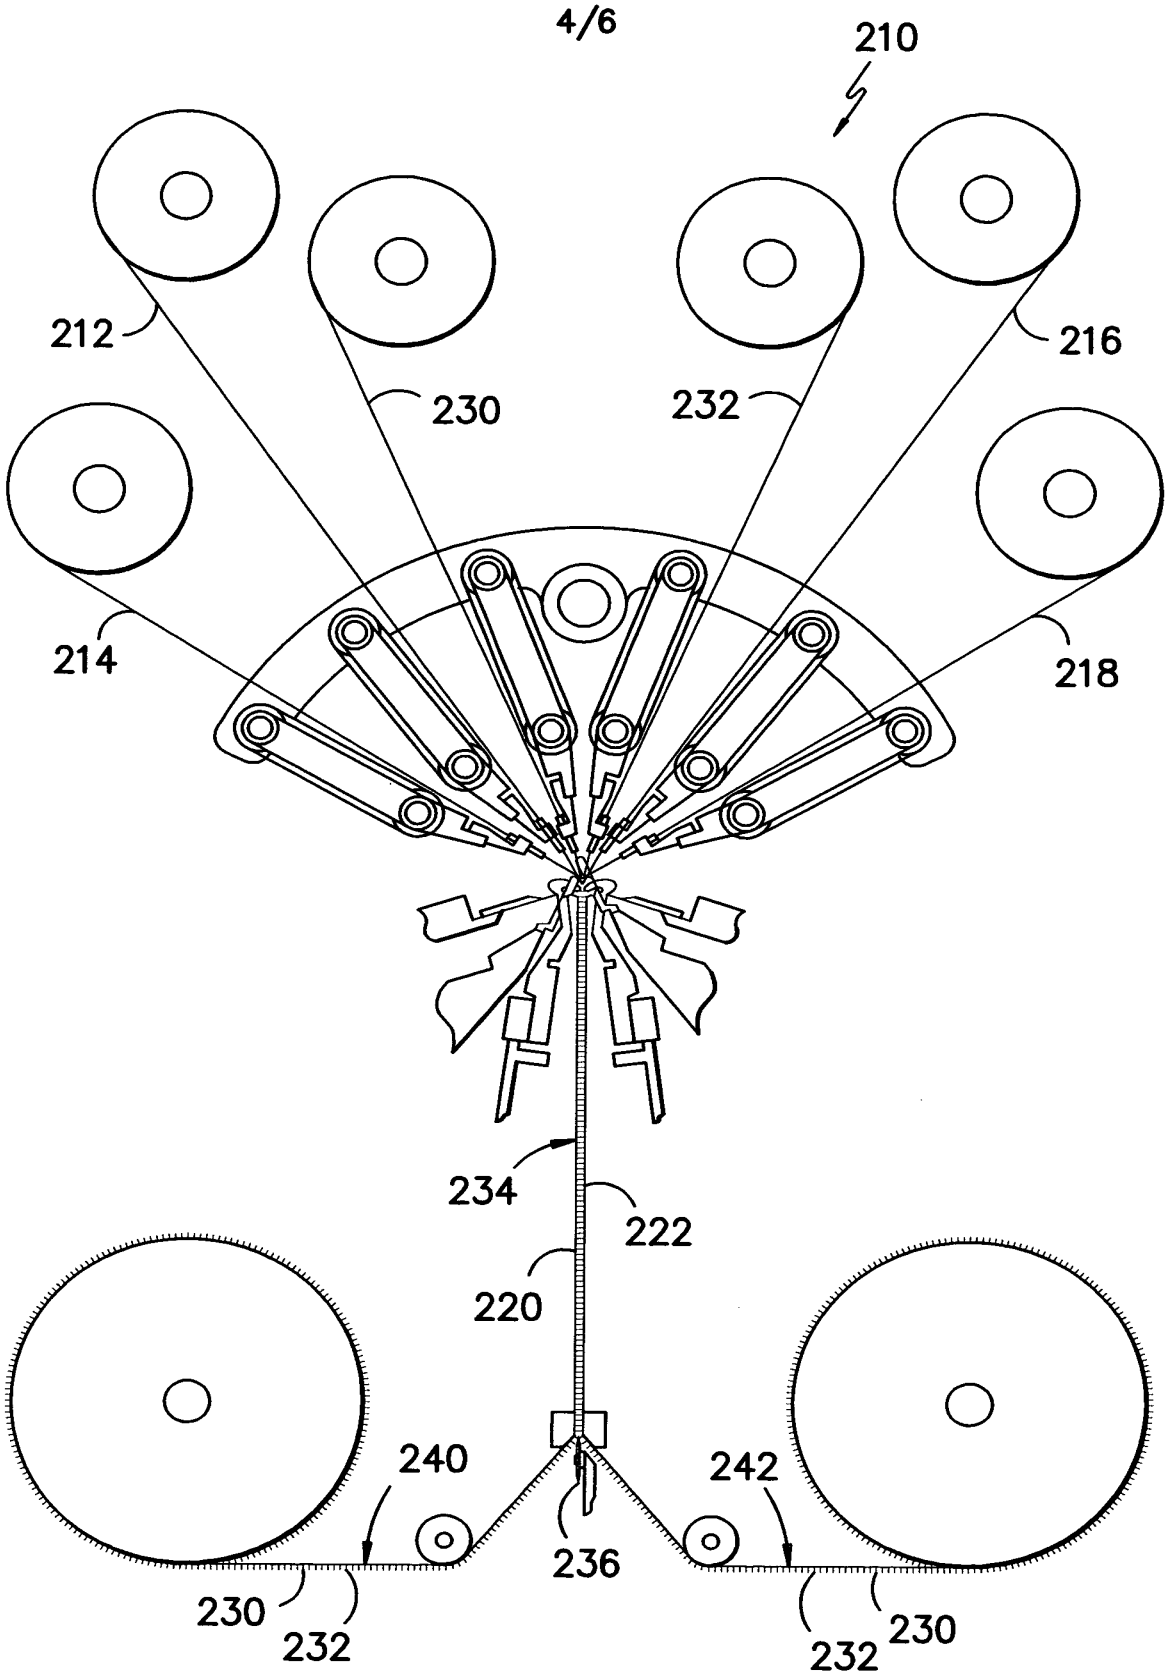
210
212
230
232
216
214
218
234
222
220
240
242
236
230
232
232
230

Figure —4—

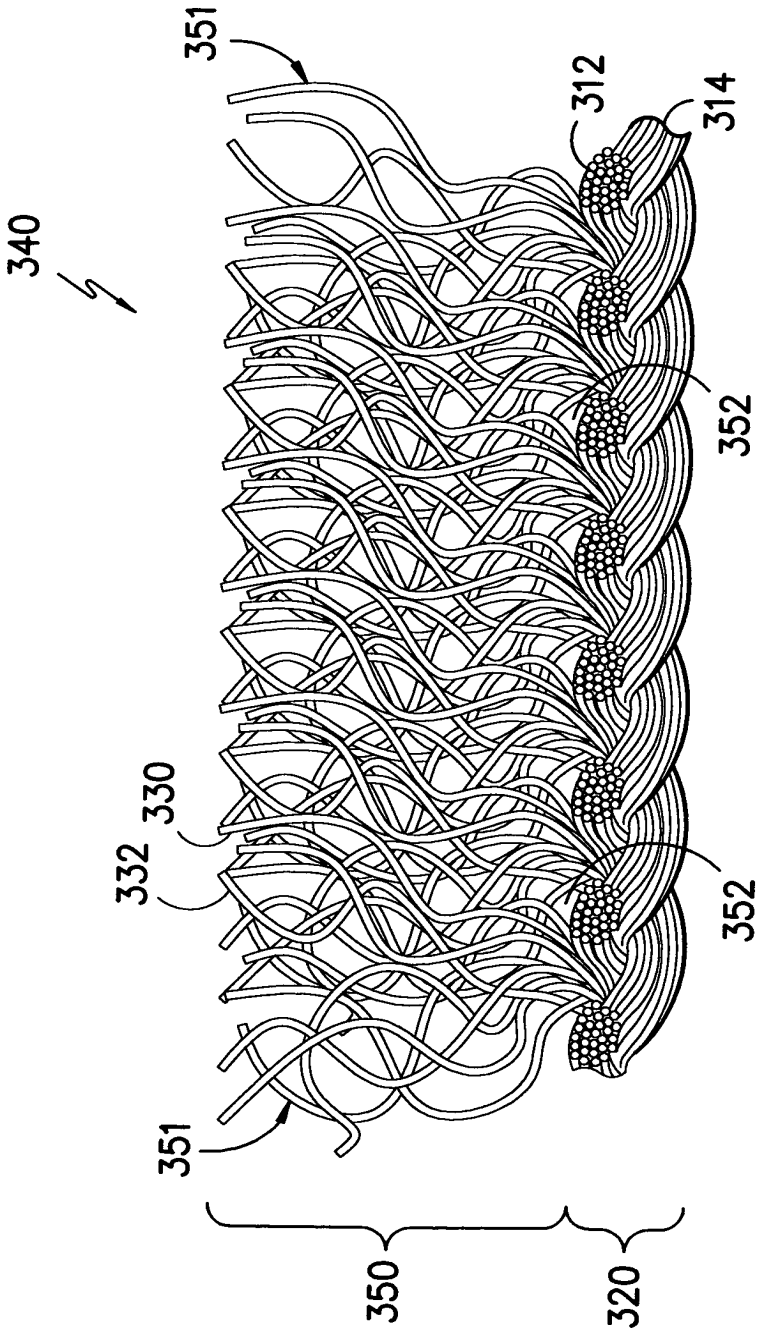

Figure -5-

Figure –6–

PRIOR ART

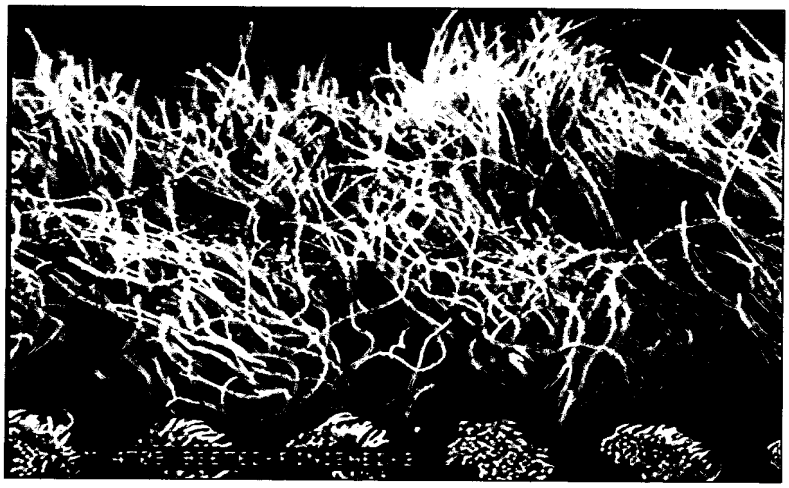

Figure –7–